

RISO Model Series

FW/GD/FT/GL

MAC OS Driver Install


Setup Guide v1.0




All driver packages are available from the RISO Download Centre -

<https://www.riso.com/download/>


1. Locate the recently downloaded file and select "PrinterDriver." To proceed, choose your RISO model from the available options to run the driver file.
2. Click Continue to proceed with the installation
3. The Window should open like this:

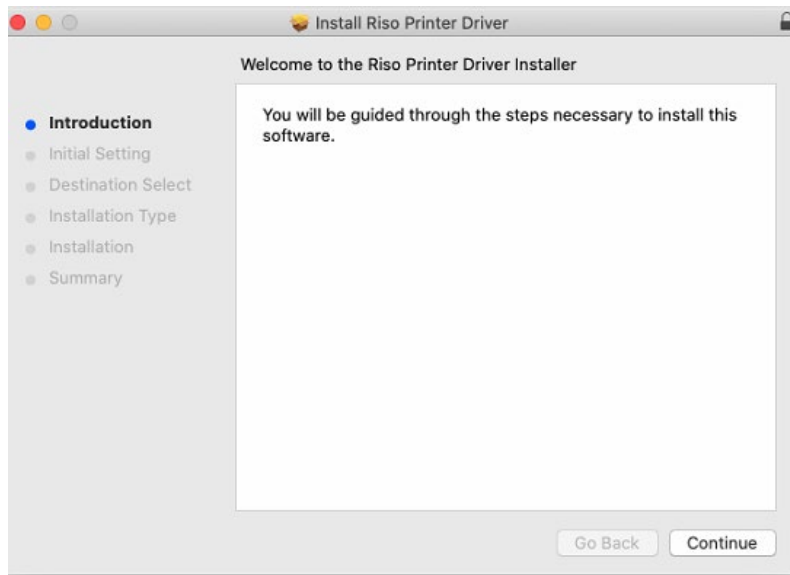


4. Click Continue to proceed with the installation
5. Select "Simplex" and click "Continue."

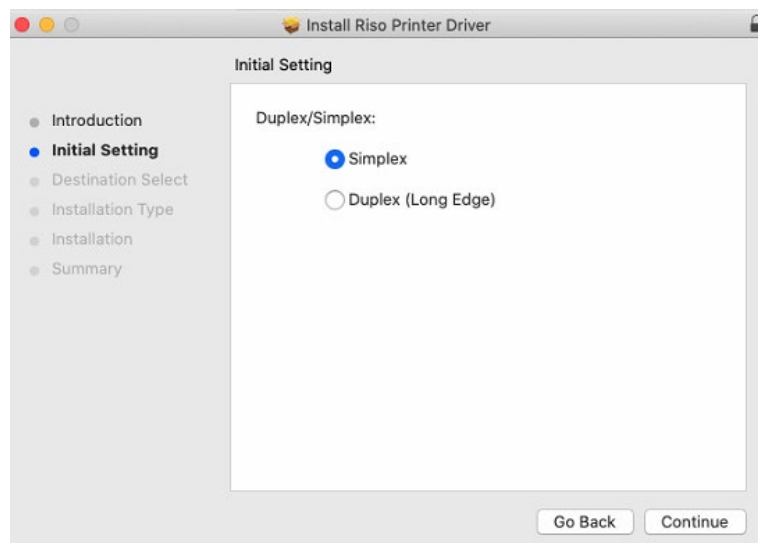


- This next page will show you how much space will be taken up by the driver. (Space required may vary)

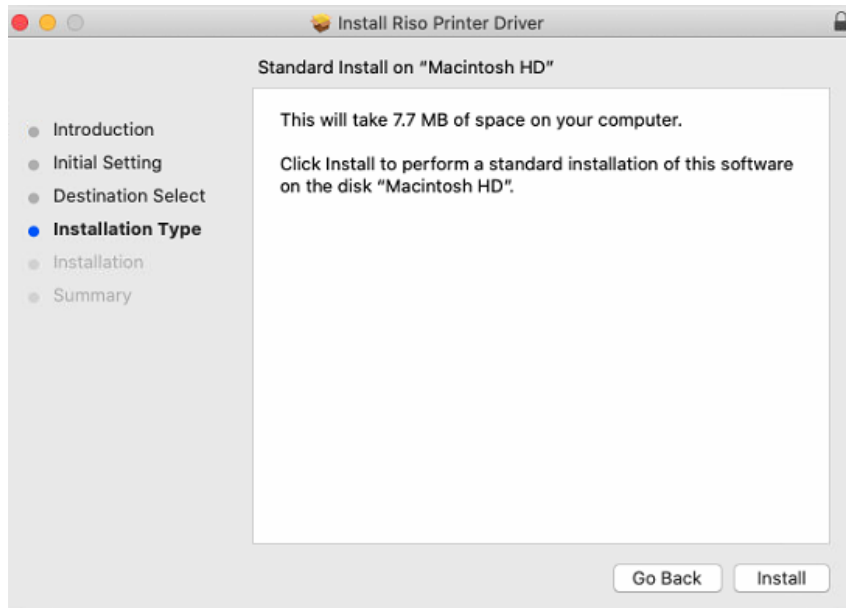


- Click Install to begin the installation (If prompted, enter your password.)
- The process may take a minute to complete (depending on computer speed)

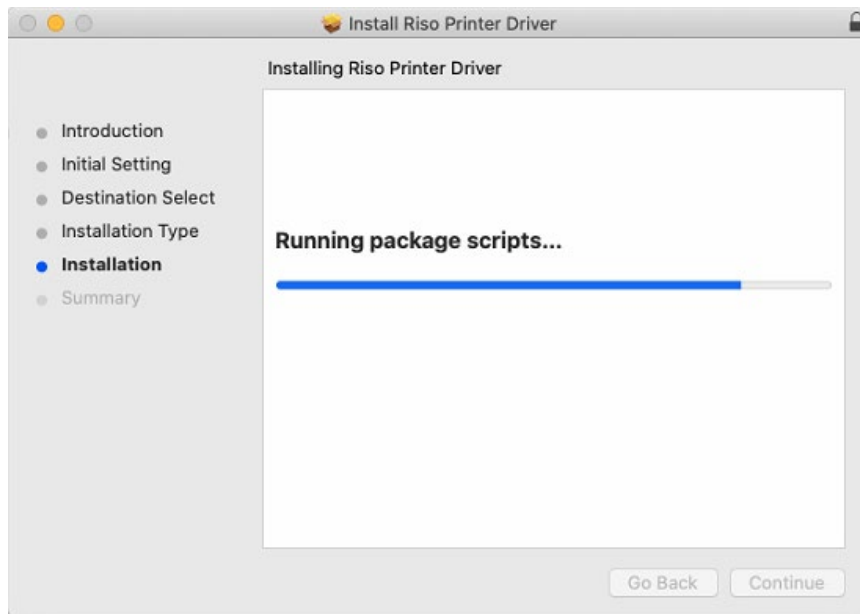


- Once complete, the driver will tell you if it was successful or not. Click close to exit out of the installation wizard.

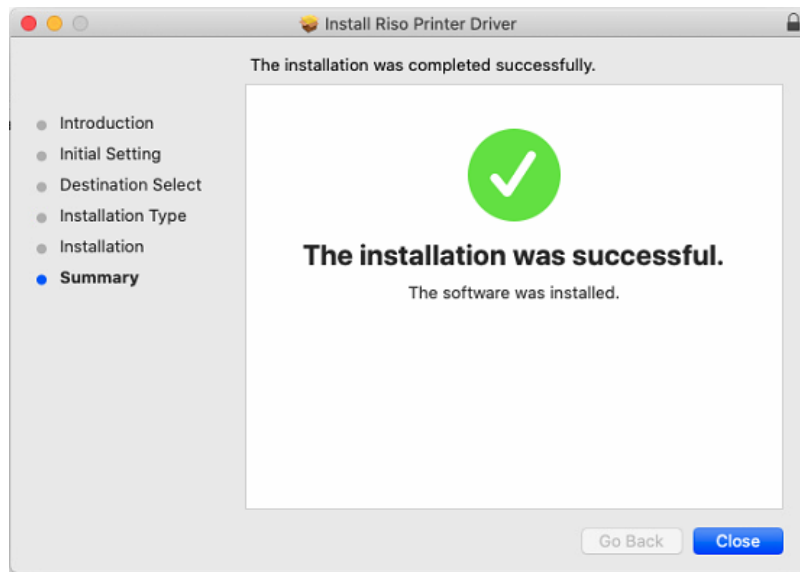


- Click the Apple Menu at the top left of the screen and select "System Preferences" (or "System Settings" if you're using macOS Ventura or later).

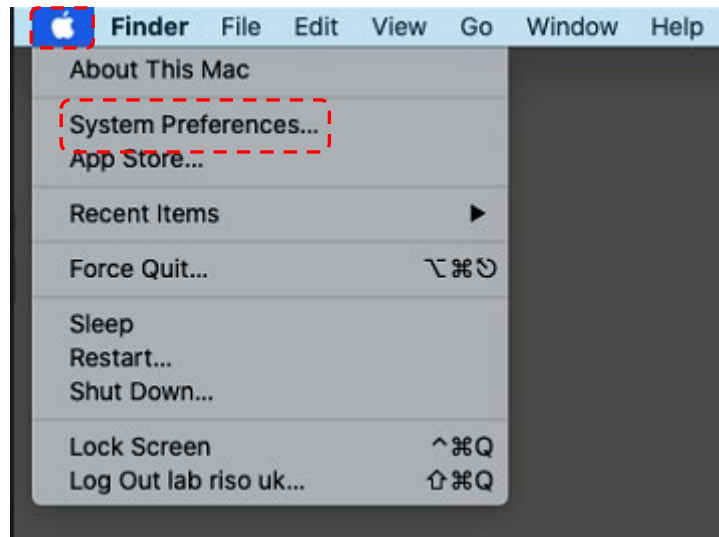

11. Click "Printers & Scanners."

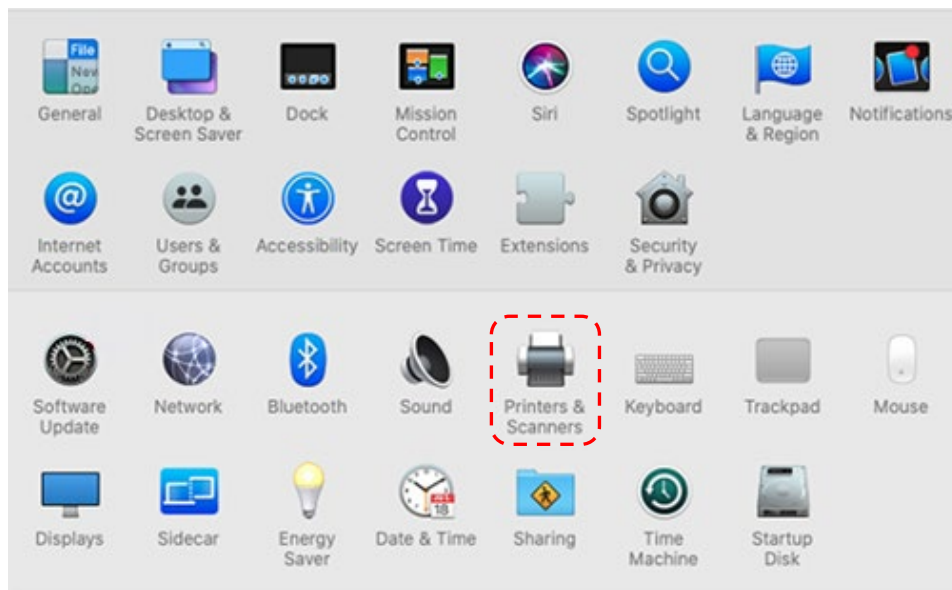


12. In the Printers & Scanners window, click the Plus icon. (For newer version like **MAC OS Ventura 13**, you need to scroll down and look for **Printers & Scanners** then click on **Add Printer, Scanner or Fax...**)

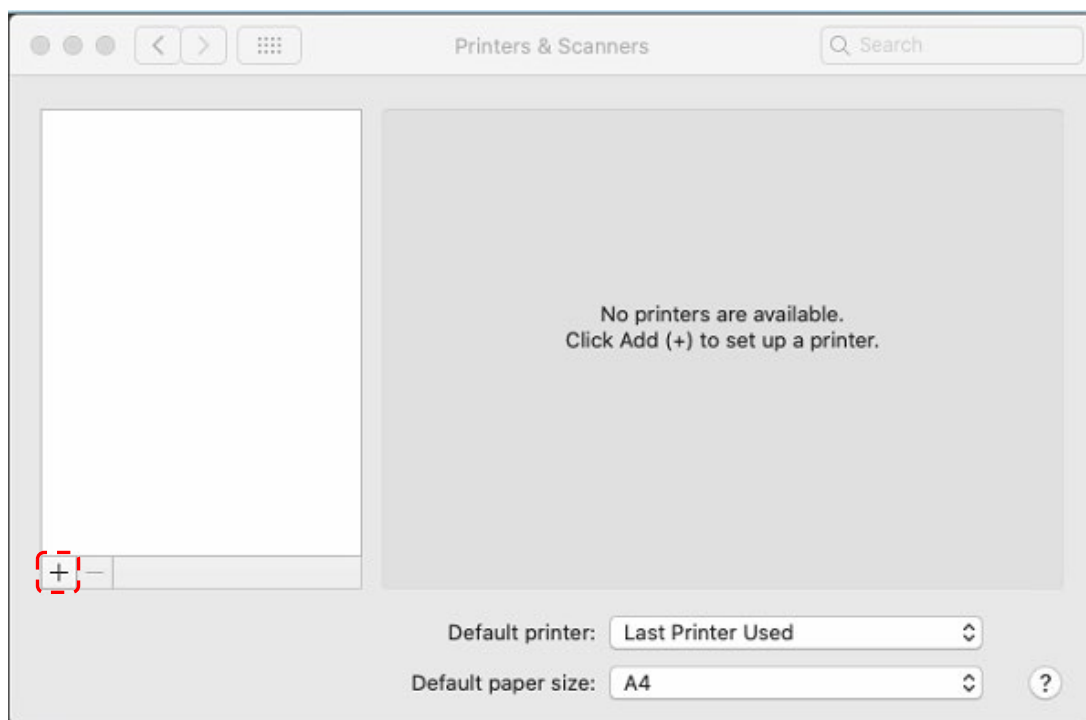

13. Select "IP" and add the Info accordingly. Lastly select printer model and click OK, and click Add to add a printer.

1. Address: **Printer IP Address**
2. Protocol: **Select "Line Printer Daemon - LPD"**
3. Queue: **Put "lp"**
4. Name: **Printer Name Display, example is "RISO FT5230"**
5. Location: **Put location of the printer if needed**
6. Use: **Select Software**
7. Search Icon on right hand side: **Type in the printer driver model that needs to be installed, in this example "FT5230".**
8. Select the **RISO ComColor FT5230, Select OK and then click Add to add the printer driver.**

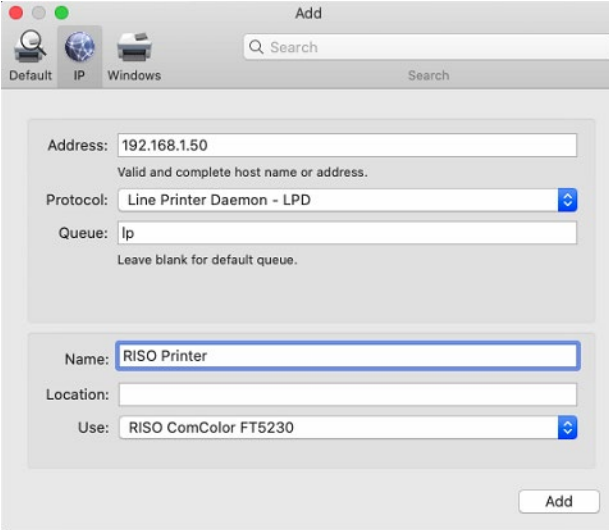

The screenshot shows a window titled "Add" with a search bar at the top right. Below the search bar are three tabs: "Default", "IP", and "Windows". The "IP" tab is selected. The form contains the following fields:

- Address:** 192.168.1.50 (with a note: "Valid and complete host name or address.")
- Protocol:** Line Printer Daemon - LPD (dropdown menu)
- Queue:** lp (with a note: "Leave blank for default queue.")
- Name:** RISO Printer
- Location:** (empty field)
- Use:** RISO ComColor FT5230 (dropdown menu)

An "Add" button is located at the bottom right of the dialog.

14. The printer will be added and installation of the Printer Driver is successful.

